


ADJUSTABLE BAND HANGER (SPRINKLER HANGER)

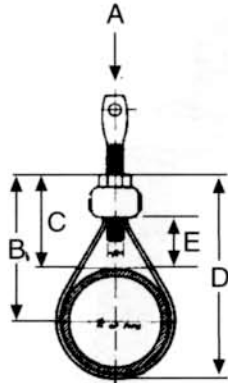

* **SIZE AVAILABILITY:** 1/2" thru 3"

* **FINISH:** Galvanized, PVC Coated

- The Adjustable Band Hanger makes vertical adjustments easy by turning the hexagonal nut as desired.
- This adjustment will be made permanent without the use of a lock nut on the hanger rod.
- The hexagonal nut can be attached to the rod before the pipe is installed.
- The band can be quickly snapped over the pipe and installed into the nut.
- Threading the hanger rod THROUGH THE NUT AND BAND must be done to insure a proper installation.
- This hanger can be used with copper, aluminum, brass and glass pipe.
- Factory Mutual approved 3/4" thru 2".
- Complies with Federal Specifications WW-H-171E (Type 9).
- Complies with Manufacturers Standardization Society SP-69 (Type 9).

* **ORDERING:** Specify pipe size, figure number, name and finish.

FIG. 12

PIPE SIZE	A	B	C	D	ADJUST E	STOCK SIZE	WEIGHT PER HD	STD PACKING	MAX LOAD
1/2"	3/8"	2-1/2"	2-1/16"	2-7/8"	1-1/8"	11/16 X7/16	10	100	200
3/4"	3/8"	2-5/8"	2-1/16"	3-1/8"	1-1/8"	11/16 X7/16	11	100	200
1"	3/8"	2-11/16"	2-1/16"	3-3/8"	1-1/8"	11/16 X7/16	13	100	200
1-1/4"	3/8"	2-15/16"	2-1/16"	3-3/4"	1-1/8"	11/16 X7/16	17	100	200
1-1/2"	3/8"	3"	2-1/8"	4"	1-3/16"	11/16 X7/16	19	100	200
2"	3/8"	3-1/4"	2-1/16"	4-7/16"	1-1/8"	11/16 X7/16	19	100	200
2-1/2"	1/2"	3-13/16"	2-3/8"	5-1/4"	1-1/4"	11/16 X7/16	36	BULK	200
3"	1/2"	4-3/16"	2-7/16"	5-15/16"	1-5/16"	11/16 X7/16	38	BULK	200

NU WAY SHIELD HANGER FOR INSULATED TUBE

* **SIZE AVAILABILITY:** 1-1/2" thru 6"

* **FINISH:** Electro-galvanized, Prime
Painted or Red Oxide in all sizes.

- The Nu- Way Shield Hangers are used for insulated pipe or tube to prevent cutting or crushing of the covering at the pipe hanger point.
- Shields are made from 12, 14, 16, 18 and 20 gauge galvanized steel.
- The hangers are regularly furnished Galvanized.
- Shields and hangers are welded together (Fig. 26 & Fig. 344 thru 6").
- Hangers and shields welded together allows for hanger installation before the pipe or tube is insulated.
- Insulation of 360° can be furnished with the hanger upon request.
- Hangers can be furnished with 8" or 12" long shields.
- See "Shield Size Selection Table" Modern Fig. 344 to assure of ordering correct hanger size for insulated pipe.
- Complies with Manufacturers Standardization Society SP-69 (Type 10 & Type 40).

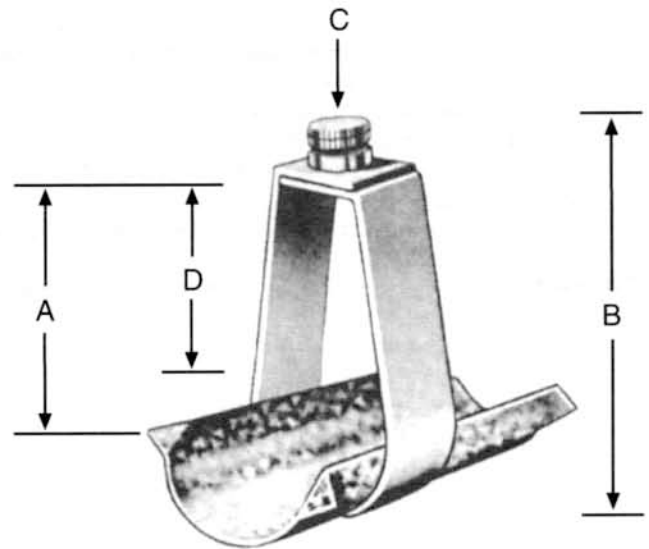


FIG. 264 CT

* **ORDERING:** Specify shield size, hanger size, figure number and give pipe (tube) size and thickness of covering.

HANGER SIZE	SHIELD SIZE	MAX OD INSULATION	SHIELD LENGTH	A	B	C	D	WEIGHT PER HD	MAX LOAD
1-1/2"	M1	1-7/8"(2.0)	8" or 12"	2-1/2"	4-1/8"	3/8"	1-3/4"	30	150
2"	2	2-3/8"(2.5)	8" or 12"	3-11/16"	4-11/16"	3/8"	1-3/4"	40	150
2-1/2"	4	2-7/8"(3.0)	8" or 12"	4-3/4"	6-1/4"	3/8"	2"	50	200
3"	6	3-5/8"(3.5)	8" or 12"	5-1/16"	6-7/8"	3/8"	2"	60	200
3-1/2"	7	4"(4.0)	8" or 12"	5-5/16"	7-3/8"	3/8"	2"	70	200
4"	8	4-5/8"(4.5)	8" or 12"	5-9/16"	7-7/8"	3/8"	2"	80	300
5"	10	5-9/16"(5.5)	8" or 12"	6-11/16"	9-1/2"	1/2"	2-1/2"	100	300
6"	12	6-5/8"(6.5)	8" or 12"	7-3/16"	10-1/2"	1/2"	2-1/2"	160	400

ADJUSTABLE SWIVEL RING-COPPER PLATED (SPRINKLER HANGER)

* **SIZE AVAILABILITY:** 1/2" thru 8".

* **FINISH:** Copper Plated, PVC Coated.

- The Nu- Way Adjustable Swivel Hanger is a steel band formed in one piece and has a double thickness of stock at the point which carries the load.
- The band can be easily slipped over the pipe during installation and provides added adjustment that most other hangers don't have.
- The swivel nut on top is knurled to give a better gripping surface, and is manufactured with countersunk threads that will not become damaged during shipping and installation.
- Turning the swivel nut will raise or lower the pipe to the desired position.
- A locking nut on the supporting rod can be used after adjustment to prevent loosening where excessive vibration may occur.
- This hanger is also designed to meet NFPA minimum rod sizes.
- Factory Mutual approved.
- Complies with Federal Specifications WW-H-171 (Type 10).
- Complies with Manufacturers Standardization Society SP-69 (Type 10).


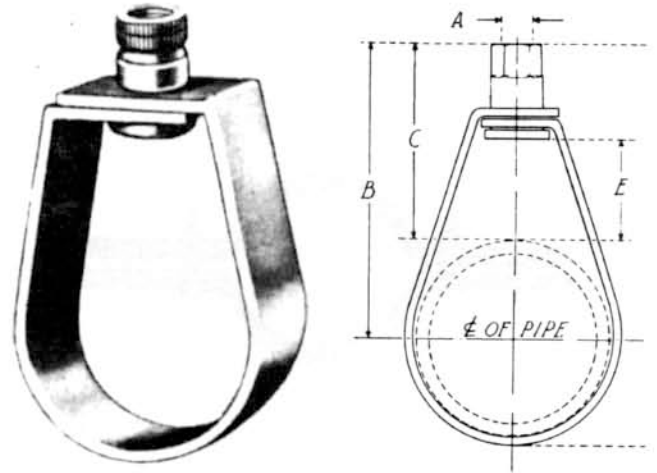


FIG. 29

* **ORDERING:** Specify size, figure number and name.

TUBE SIZE	A	B	C	D	E	STOCK SIZE	WEIGHT PER HD	STD PKG	MAX LOAD
1/2"	3/8"	3-1/2"	3-3/16"	4"	2-1/4"	7/8" X 16 GA	20	100	200
3/4"	3/8"	3-3/8"	3"	4"	2"	7/8" X 16 GA	20	100	200
1"	3/8"	3-1/4"	2-11/16"	3-7/8"	1-5/8"	7/8" X 16 GA	20	100	300
1-1/4"	3/8"	3-3/8"	2-11/16"	4-3/16"	1-3/4"	7/8" X 16 GA	22	100	300
1-1/2"	3/8"	3-11/16"	2-7/8"	4-9/16"	1-7/8"	7/8" X 16 GA	25	100	300
2"	3/8"	3-13/16"	2-3/4"	5"	1-3/4"	7/8" X 16 GA	27	100	300
2-1/2"	3/8"	3-1/2"	2-1/2"	4-1/2"	1-3/4"	7/8" X 16 GA	30	50	400
3"	3/8"	4"	3"	5-1/4"	2"	1" X 14 GA	34	50	500
3-1/2"	3/8"	5-5/16"	3-1/4"	7-3/8"	2"	1" x 14 GA	40	50	500
4"	3/8"	5-9/16"	3-1/4"	7-7/8"	2"	1" x 14 GA	54	50	700
5"	1/2"	6-11/16"	3-7/8"	9-1/2"	2-1/2"	1-1/4" x 12 GA	75	BULK	700
6"	1/2"	7-3/16"	3-7/8"	10-1/2"	2-1/2"	1-1/4" x 12 GA	86	BULK	800

ADJUSTABLE BAND HANGER-COPPER PLATED (SPRINKLER HANGER)

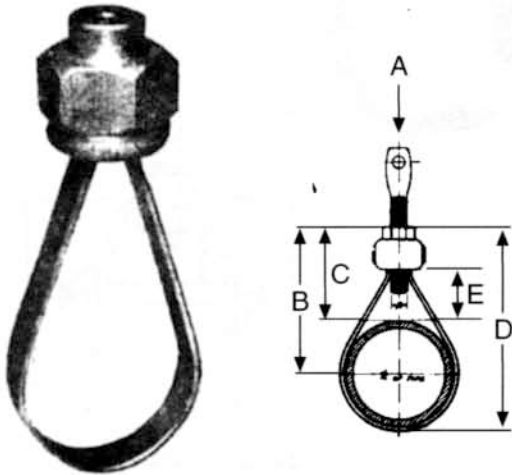

* **SIZE AVAILABILITY:** 1/2" thru 4".

* **FINISH:** Copper Plated or PVC Coated.

- This band hanger and hexagon nut are made from low carbon steel.
- The band may be removed from the nut, spread apart to go over the tubing, and then inserted back into the nut.
- The top steel, hexagon adjusting nut's design allows for easy installation.

NOTE: Screwing the supporting rod into and through the nut locks the ring into position and must be done on every hanger installed.

- Modern Fig. 11 is designed for stationary pipe lines and where no expansion or contraction occurs.
- It is also recommended for installations of aluminum, brass, glass, conduit and copper pipe lines.
- Maximum recommended temperature is 450°F.
- Complies with Federal Specifications WW-H- 171e (Type 9).
- Complies with Manufacturers Standardization Society SP-69 (Type 9).

* **ORDERING:** Specify tube size, figure number and name.

FIG. 11


TUBE SIZE	ADJUSTABLE RING					WEIGHT PER/HD	STANDARD PACKING	MAX. LOAD
	A	B	C	D	E			
1/2"	3/8"	2-9/16	2-1/4	2-7/8	1-1/4	10	100	250
3/4"	3/8"	2-9/16	2-1/8	3	1-1/4	10	100	250
1"	3/8"	2-11/16	2-1/8	3-1/4	1-1/4	11	100	250
1-1/4"	3/8"	2-11/16	2	3-3/8	1-1/4	13	100	250
1-1/2"	3/8"	2-13/16	2	3-5/8	1-1/4	17	100	250
2"	3/8"	3-5/16	2	4-3/8	1-1/4	19	100	250
2-1/2"	3/8"	3-5/16	1-3/4	4-3/8	1	19	100	250
3"	1/2"	4-5/16	2	5-1/8	1	36	50	400
4"	1/2"	5-7/16	2	7-1/16	2	75	50	600

NU-WAY SHIELD HANGER FOR INSULATED PIPE

* **SIZE AVAILABILITY:** 1-1/2" thru 6"

* **FINISH:** Galvanized, Prime
Painted or Red Oxide in all sizes.

- The Nu- Way Shield Hangers are used for insulated pipe or tube to prevent cutting or crushing of the covering at the pipe hanger point.
- Shields are made from 12, 14, 16, 18 and 20 gauge galvanized steel.
- The hangers are regularly furnished Galvanized.
- Shields and hangers are welded together (Fig. 26 & Fig. 344 thru 6".
- Hangers and shields welded together allows for hanger installation before the pipe or tube is insulated.
- Insulation of 360° can be furnished with the hanger upon request.
- Hangers can be furnished with 8" or 12" long shields.
- See "Shield Size Selection Table" Modern Fig. 344 to assure of ordering correct hanger size for insulated pipe.
- Complies with Manufacturers Standardization Society SP-69 (Type 10 & Type 40).

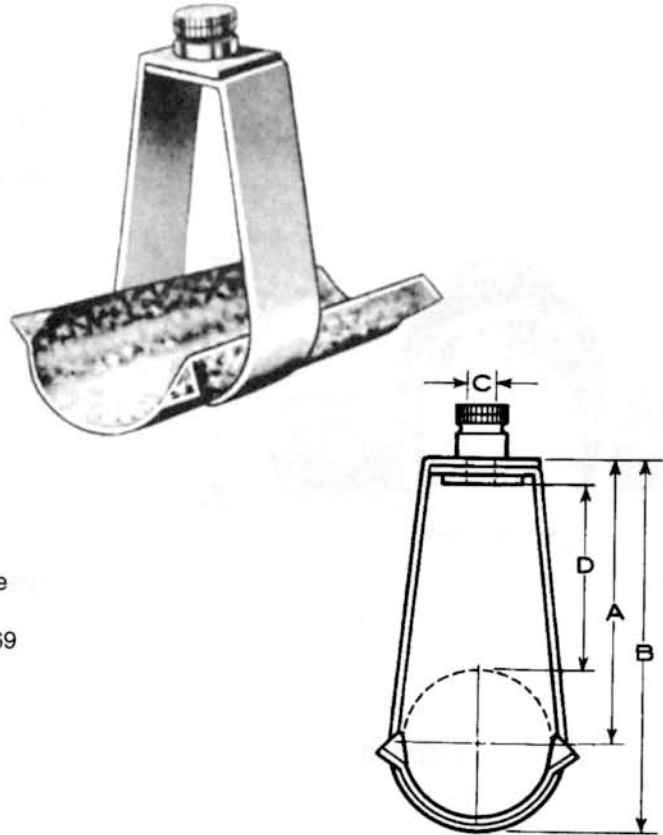

* **ORDERING:** Specify shield size, hanger size, figure number and give pipe (tube) size and thickness of covering.

FIG. 264


HANGER SIZE	SHIELD SIZE	MAX OD INSULATION	SHIELD LENGTH	A	B	C	D	WEIGHT PER HD	MAX LOAD
1-1/2"	M1	1-7/8" (2.0)	8" or 12"	2-1/2"	4-1/8"	3/8"	1-3/4"	30	150
2"	2	2-3/8" (2.5)	8" or 12"	3-11/16"	4-11/16"	3/8"	1-3/4"	40	150
2-1/2"	3	2-7/8" (3.0)	8" or 12"	4-3/4"	6-1/4"	3/8"	2"	50	200
3"	5	3-5/8" (3.5)	8" or 12"	5-1/16"	6-7/8"	3/8"	2"	60	200
3-1/2"	7	4" (4.0)	8" or 12"	5-5/16"	7-3/8"	3/8"	2"	70	200
4"	8	4-5/8" (4.5)	8" or 12"	5-9/16"	7-7/8"	3/8"	2"	80	300
5"	10	5-9/16" (5.5)	8" or 12"	6-11/16"	9-1/2"	1/2"	2-1/2"	100	300
6"	12	6-5/8" (6.5)	8" or 12"	7-3/16"	10-1/2"	1/2"	2-1/2"	160	400

NU-WAY ADJUSTABLE SWIVEL HANGER (SPRINKLER HANGER)

* **SIZE AVAILABILITY:** 1/2" thru 8".

* **FINISH:** Galvanized, PVC Coated.

- The Nu- Way Adjustable Swivel Hanger is a steel band formed in one piece and has a double thickness of stock at the point which carries the load.
- The band can be easily slipped over the pipe during installation and provides added adjustment that most other hangers don't have.
- The swivel nut on top is knurled to give a better gripping surface, and is manufactured with countersunk threads that will not become damaged during shipping and installation.
- Turning the swivel nut will raise or lower the pipe to the desired position.
- A locking nut on the supporting rod can be used after adjustment to prevent loosening where excessive vibration may occur.
- This hanger is also designed to meet NFPA minimum rod sizes.
- Factory Mutual approved.
- Complies with Federal Specifications WW-H-171 (Type 10).
- Complies with Manufacturers Standardization Society SP-69 (Type 10).

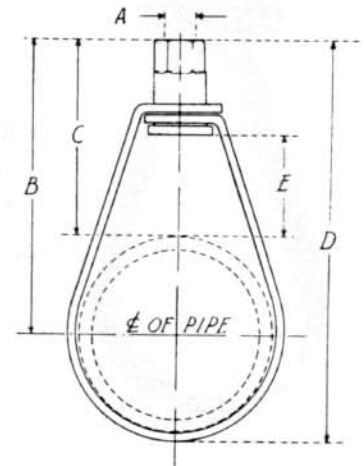

* **ORDERING:** Specify size, figure number and finish.

FIG. 26

PIPE SIZE	STOCK SIZE	A	B	C	D	E	WEIGHT PER HD	STD PKG	MAX LOAD
1/2"	7/8" X 16 GA	3/8"	3-5/16"	2-3/4"	3-15/16"	1-3/4"	17	100	200
3/4"	7/8" X 16 GA	3/8"	3-5/16"	2-3/4"	3-15/16"	1-3/4"	17	100	200
1"	7/8" X 16 GA	3/8"	3-7/16"	2-3/4"	4-3/16"	1-3/4"	18	100	300
1-1/4"	7/8" X 16 GA	3/8"	3-9/16"	2-3/4"	4-7/16"	1-3/4"	24	100	300
1-1/2"	7/8" X 16 GA	3/8"	3-11/16"	2-3/4"	4-11/16"	1-3/4"	27	100	300
2"	7/8" X 16 GA	3/8"	3-15/16"	2-3/4"	5-3/16"	1-3/4"	30	100	300
2-1/2"	1" X 14 GA	3/8"	4-3/4"	3-1/4"	6-1/4"	2"	32	50	400
3"	1" X 14 GA	3/8"	5-1/16"	3-1/4"	6-7/8"	2"	34	50	400
3-1/2"	1" X 14 GA	3/8"	5-5/16"	3-1/4"	7-3/8"	2"	38	50	400
4"	1" X 14 GA	3/8"	5-9/16"	3-1/4"	7-7/8"	2"	45	50	500
5"	1-1/4" X 12 GA	1/2"	6-11/16"	3-7/8"	9-1/2"	2-1/2"	62	BULK	700
6"	1-1/4" X 12 GA	1/2"	7-3/16"	3-7/8"	10-1/2"	2-1/2"	82	BULK	900